

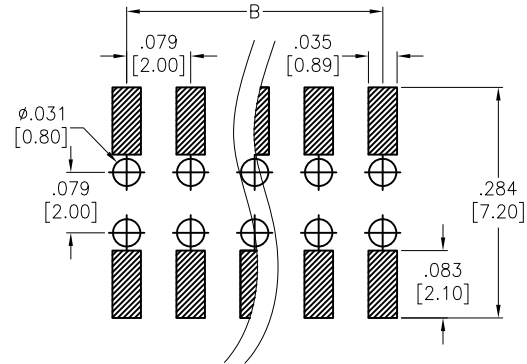
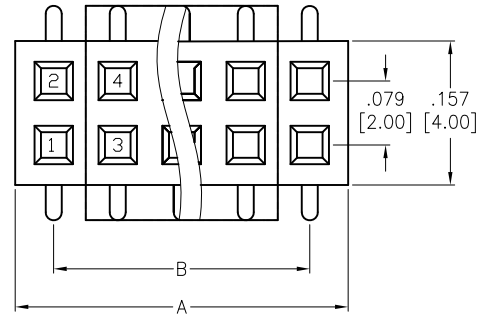


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/16/18	
A		UPDATE LAYOUT	1/23/19	AY/YC

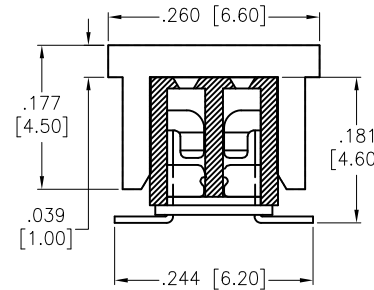

RECOMMENDED PCB LAYOUT

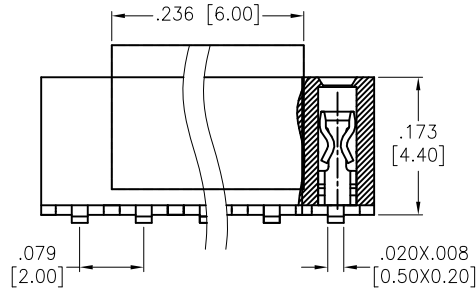

**SPECIFICATIONS:**

Material:  
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Current rating: 2 Amp.  
 Contact resistance: 20 mohms max.  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 500 VAC  
 Temperature Rating:  
 -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 80  
 A = .079 [2.00] x No. of Positions per Row +.020 [0.50]  
 B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

**ADAM TECH**  
**INTERCONNECTS**  
 909 Rahway Avenue,  
 Union, NJ 07083  
 Phone: 908-687-5000  
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	AY	7/16/18
CHECKED	KC	7/16/18
APPROVED		

TITLE .079 x .079 DUAL ROW RECEPTACLE STRIP .173 [4.40] HEIGHT, GOLD PLATED		
SIZE X	PART NO. 2RS2Y-XX-G-SMT-PP-T/R	REV. A
REF: S00111C	SCALE: NTS	SHEET 1 OF 1