
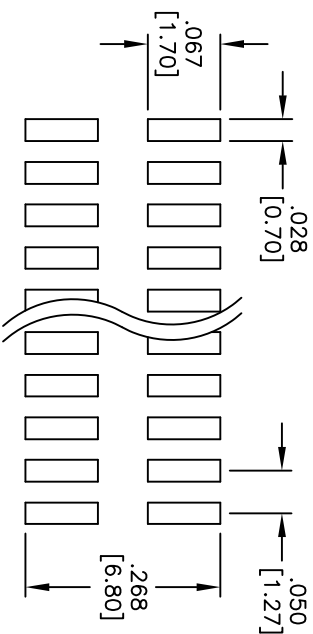




Rev	AWO #	Description	Date	Appr
-		RELEASED	10/19/09	

APPROVED: _____

DATE: _____ TITLE: _____

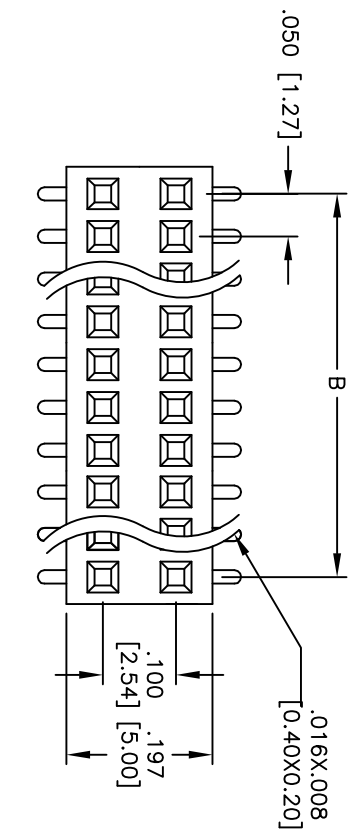

Recommended PCB Layout

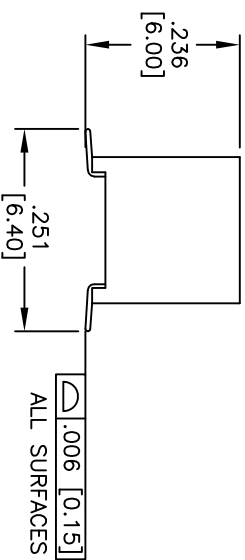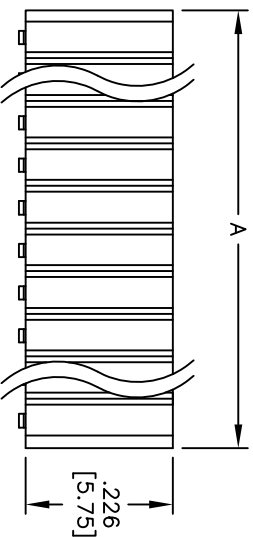

SPECIFICATIONS:

Material:

Insulator: Nylon 6T, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate on contact area,
Tin over copper underplate on tails.

Electrical:

Operating voltage: 250 VAC max.

Current rating: 1 Amp max.

Contact resistance: 20 mohms max. initial

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 300 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 04 thru 100
A = .050 [1.27] x No. of Positions per Row + .012 [0.30]
B = .050 [1.27] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.050" X .100" DUAL ROW RECEPTACLE STRIP
.226 [5.75] HEIGHT, SURFACE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				Holes			
INCHES				Holes			
.X	± .10	Ø.X	± .10	.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015	.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010	.XXX	± .015	Ø.XXX	± .010
APPROVALS				DATE			
DRAWN	DY		10/19/09				
CHECKED							
APPROVED							
SIZE				PART NO.			
X				HRS-2F-XX-SG-SMT			
REF:				SCALE: NTS			
				SHEET 1 OF 1			