

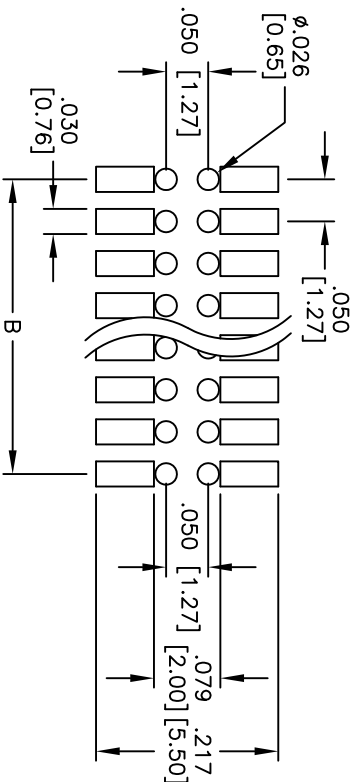
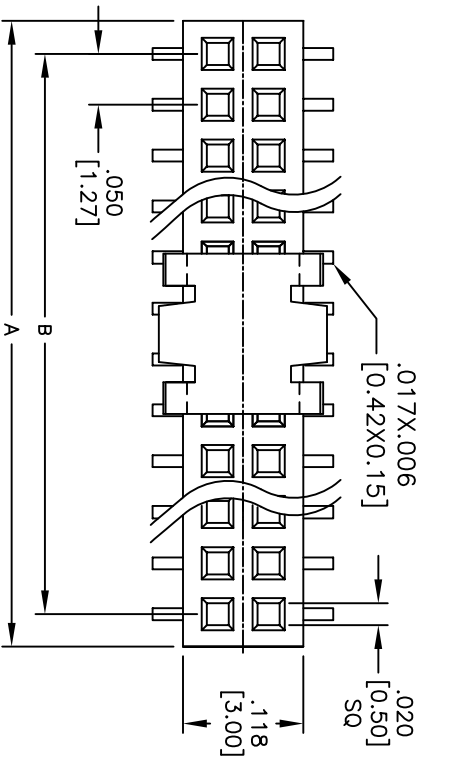


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/07/09	
A		REDRAWN	2/15/12	
B		ADDED SPEC.	7/23/15	HR/NC

APPROVED: _____
DATE: _____ TITLE: _____

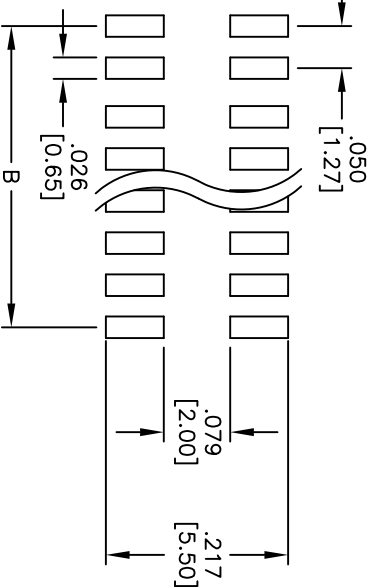

Recommended PCB Layout

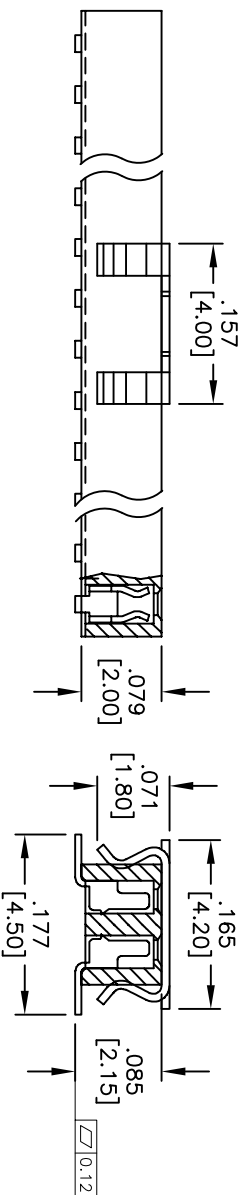

Recommended PCB Layout

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold flash over Nickel underplate overall.
Electrical:
Current rating: 1 Amp max.
Contact resistance: 20 mohms max. initial
Insulation resistance: 1,000 Mohms min.
Dielectric withstanding: 300V AC
Temperature Rating: Operating temperature: -40°C to +105°C
Environmental: Lead free, RoHS compliant

PACKAGED ON TAPE & REEL

Positions: 02 thru 40
A = .050 [1.27] x No. of Positions per Row + .009 [0.24]
B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH 909 Railway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES .X ± .10 .XX ± .020 .XXX ± .015		HOLES ØX ± .10 ØXX ± .015 ØXXX ± .010	
APPROVALS		DATE	
DRAWN DY		5/07/09	
CHECKED		SIZE	
APPROVED		X PART NO. HRS-2G-XX-G-SMT-PP-TIR	
REF: S00032T		SCALE: NTS	
		SHEET 1 OF 1	