




APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/13/15	
A		UPDATE DIM.	3/26/20	AY/DH




Special Cap for 04 thru 08

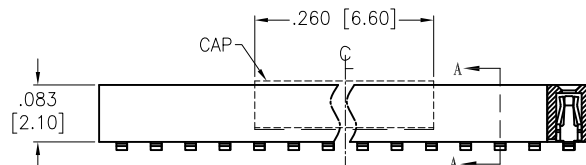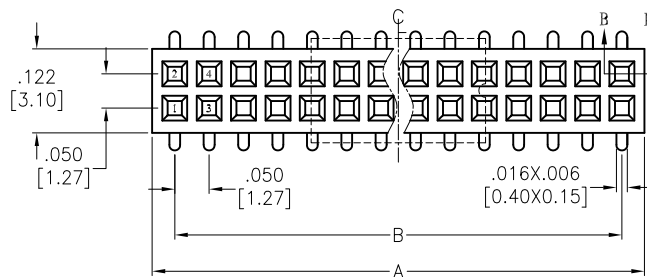

SECTION B-B

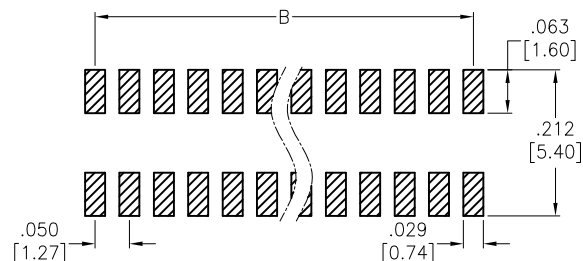

RECOMMENDED PCB LAYOUT

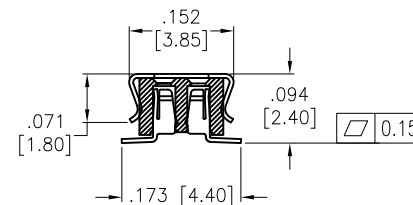

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 1.0 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC/DC

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 04 thru 100

A = .050 [1.27] x No. of Positions + .016 [0.40]

B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DATE

DRAWN

HR

2/13/15

CHECKED

SL

2/13/15

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.050 [1.27] DUAL ROW RECEPTACLE STRIP
.083 [2.10] HEIGHT, GOLD PLATED, SMT TYPE

SIZE

X

PART NO.

HRS-2L-XX-G-SMT-PP-T/R

REV.

A

REF: S00019C

SCALE: NTS

SHEET 1 OF 1