

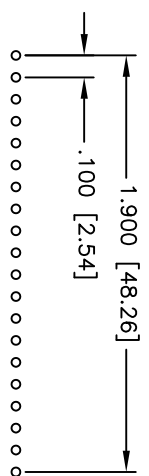


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/3/12	

APPROVED: _____
 DATE: _____ TITLE: _____

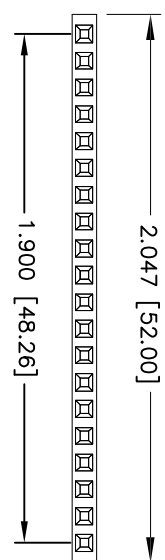

RECOMMENDED PCB LAYOUT

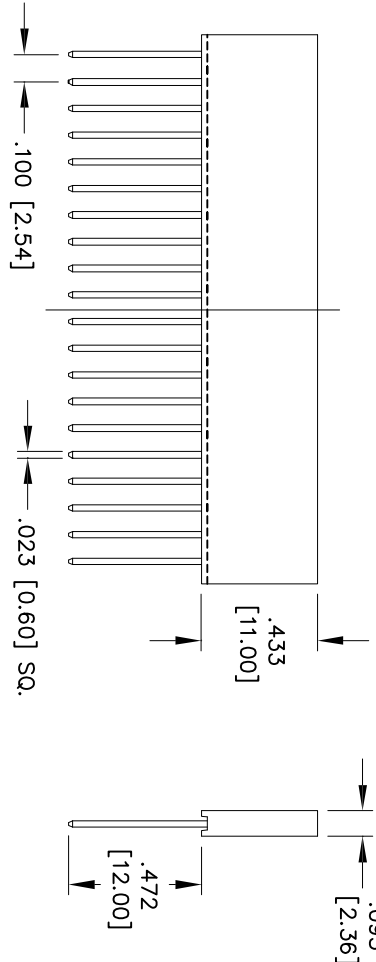

SPECIFICATIONS:
 Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Plating: Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] RECEPTACLE STRIPS, GOLD PLATED
 PC104 ISA SOCKET, 20 PIN

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE	
.X ± .10	ØX ± .10	ØX ± .10	± .10
.XX ± .020	ØXX ± .015	ØXXX ± .015	± .010
.XXX ± .015	ØXXX ± .010		
APPROVALS		DATE	
DRAWN AY		4/3/12	
CHECKED SC		4/3/12	
APPROVED			

REF: S0003T	SCALE: NTS	SHEET 1 OF 1
SIZE X	PART NO. RS-20-G-ISA	REV. -