
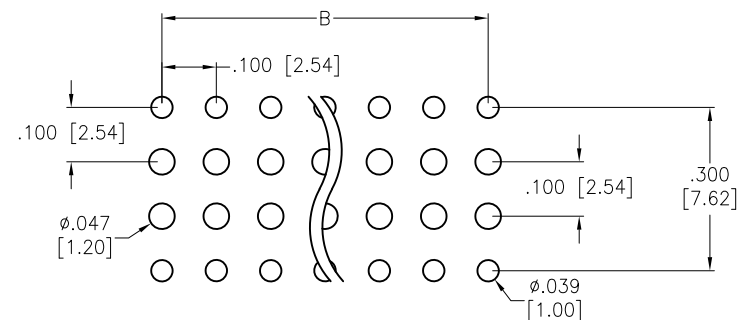




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/31/05	
A		UPDATED	11/29/07	
B		UPDATED DRAWING	7/19/17	HR/AY1
C		UPDATED SPEC.	11/23/23	LH/KC

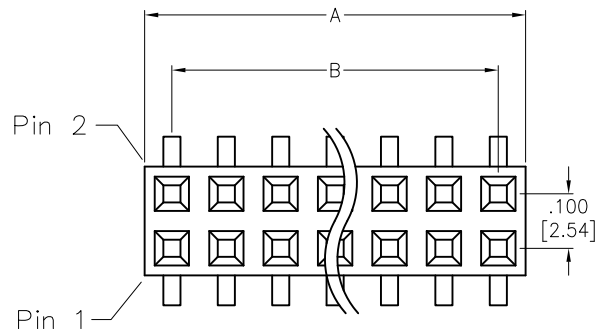

RECOMMENDED PCB LAYOUT

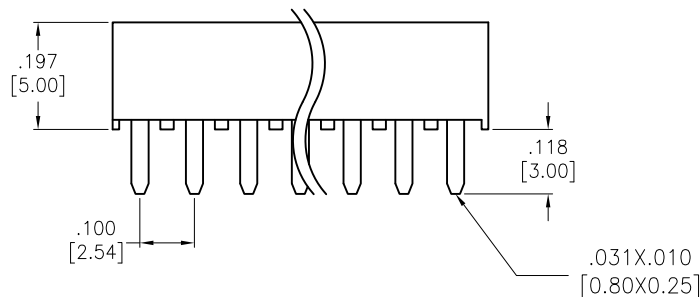

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall

Electrical:

Current rating: 3 Amps

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant



Positions: 04 thru 80

A = .100 [2.54] x No. of Positions per Row

B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

DRAWN	SS	11/23/23
CHECKED		
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.100 x .100 DUAL ROW RECEPTACLE STRIP
DUAL ENTRY, .197 [5.00] HEIGHT

SIZE X	PART NO. RS2BE-C-XX-G	REV. C
REF: S00059T	SCALE: NTS	SHEET 1 OF 1