

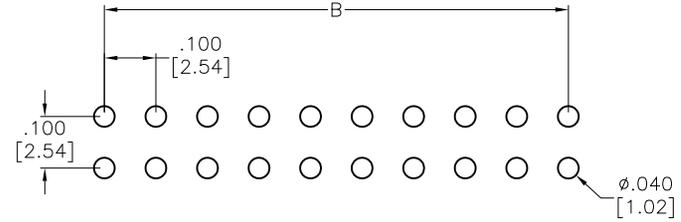
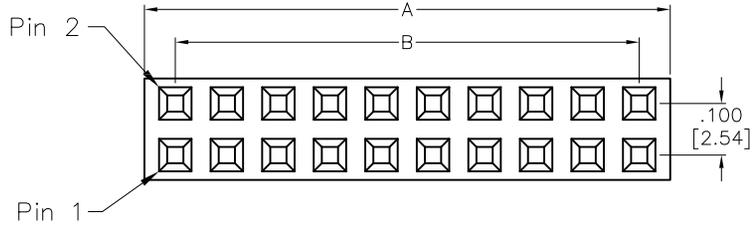


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/02/10	
A		UPDATE DRAWING	9/7/17	AY/SL

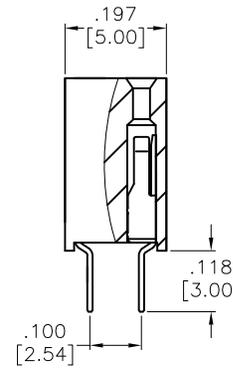

RECOMMENDED PCB LAYOUT

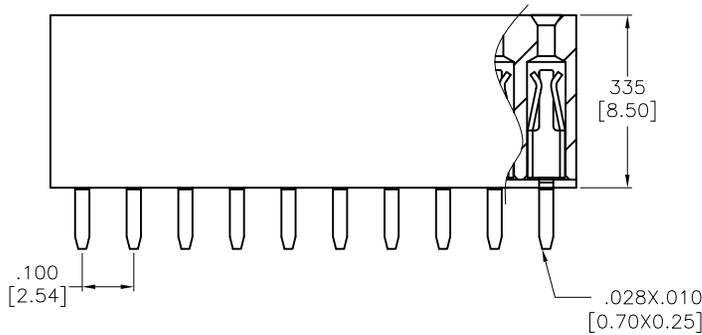

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Current rating: 3 Amp.
 Contact resistance: 20 mohms max.
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant

Positions: 04 thru 80

A = 04~20P: .100 [2.54] x No. of Positions Per row
 22~80P: .100 [2.54] x No. of Positions Per row +.016 [0.40]
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] RECEPTACLE STRIP, DUAL ROW
 .335 [8.50] HEIGHT, GOLD PLATED

APPROVALS		DATE
DRAWN	DY	8/02/10
CHECKED		
APPROVED		

SIZE	PART NO.	REV.
X	RS2T-XX-G	A
REF: S00059T	SCALE: NTS	SHEET 1 OF 1

