

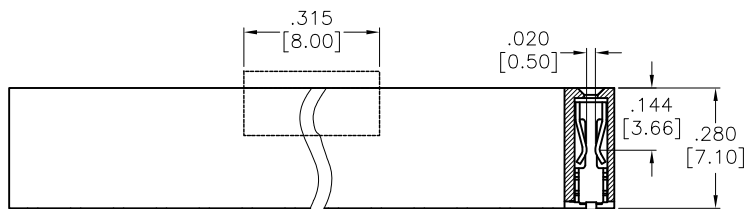
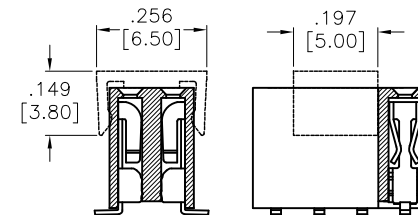
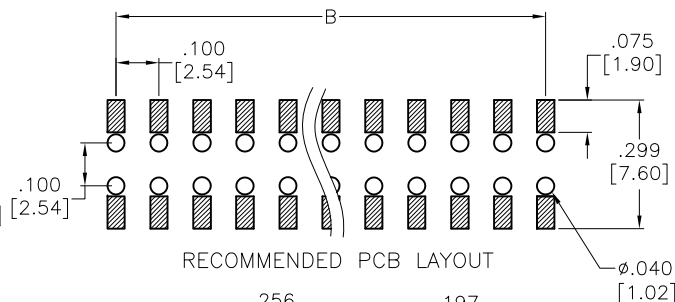


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/23/20	

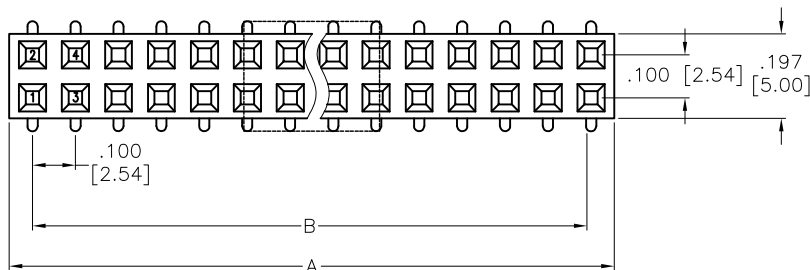

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Nickel underplate on SMT tails.
 Electrical:
 Rated Current: 3 Amp
 Contact resistance: 20 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC/DC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 04 thru 80

A=.100 [2.54] X No. of Positions Per row + .008 [0.20]

B=.100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ±.10 Ø.X ±.10 .XX ±.020 Ø.XX ±.015 .XXX ±.015 Ø.XXX ±.010			ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS			TITLE	
DRAWN		HR	.100 X .100 DUAL ROW FEMALE HEADER	
CHECKED		GC	SMT, SEL GOLD PLATED	
APPROVED			SIZE X	
			PART NO. RSM2-A-XX-SG-SMT-PP-T/R	
			REV. -	
			REF: S00019C	
			SCALE: NTS	
			SHEET 1 OF 1	