



APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/19/15	
A		UPDATE SPEC.	6/12/19	AY/BC

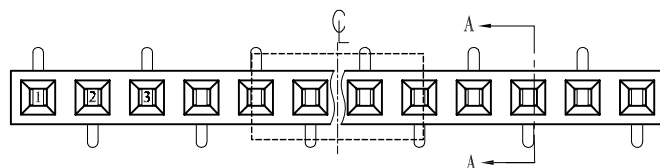


A TYPE

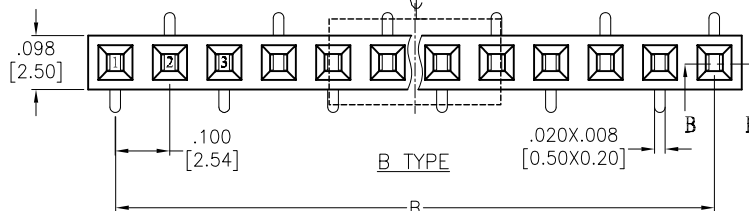


B TYPE

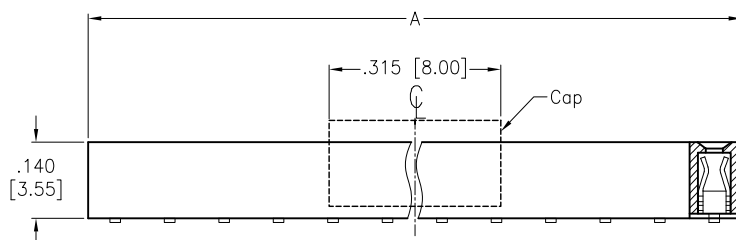

SECTION B-B

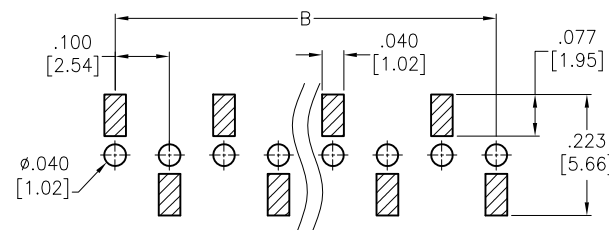


RSVL-1F-XX-G-SMT-A-PP-TR

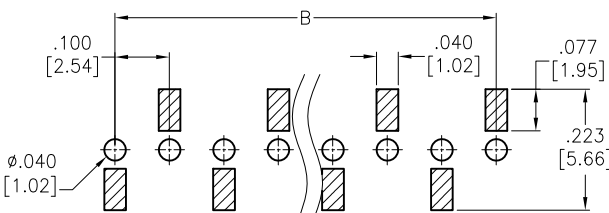

RSVL-1F-XX-G-SMT-B-PP-TR

RECOMMENDED PCB LAYOUT



SECTION A-A

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Gold flash over Nickel underplate overall.

Electrical:

Current rating: 3.0 Amp.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 1,000 VAC/DC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +125°C (Gold)

-40°C to +105°C (Tin)

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

Positions: 02 thru 40

A = .100 [2.54] x No. of Positions per Row

B = .100 [2.54] x No. of Space

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS

DATE

DRAWN

AY

5/19/15

CHECKED

OC

5/19/15

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
RECEPTACLE STRIP, VERY LOW PROFILE,
SINGLE ROW, SURFACE MOUNT

SIZE
X

PART NO.
RSVL-1F-XX-G-SMT-X-PP-T/R

REV.
A

REF: S00019C

SCALE: NTS

SHEET 1 OF 1