

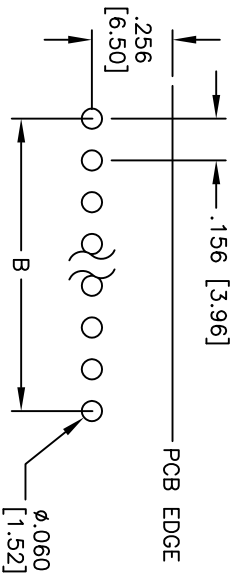
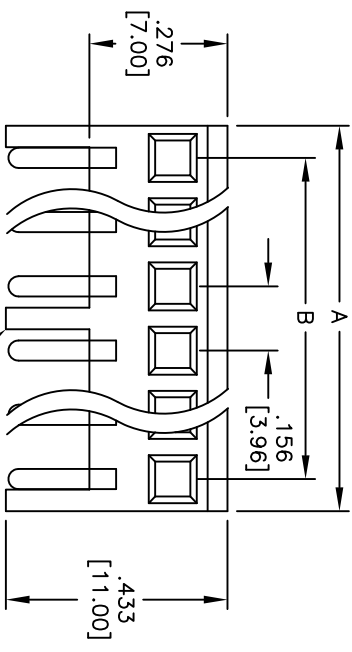


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	9671	RELEASED	7/24/09	
A		REVISED SPEC.	3/8/13	
B		ADDED SPEC.	3/12/13	
C		REVISED SPEC.	5/23/13	

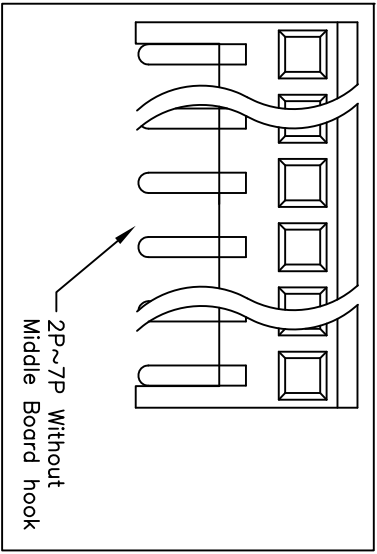

RECOMMENDED PCB LAYOUT

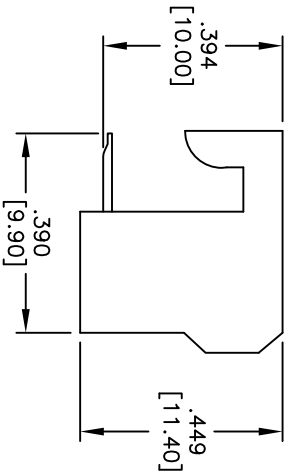

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-2
Insulator color: Clear White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max.
Current rating: 5 Amps max.
Contact resistance: 6 mohms max. initial
Insulation resistance: 50000 Mohms min.
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Mechanical:
Recommended PCB thickness: 0.062" (1.57mm)
Temperature Rating: 0°C to +75°C
Environmental:
Lead free, RoHS compliant

Positions: 02 thru 16
A = .156 [3.96] x No. of Positions
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				INCHES				Holes			
.X	± .10	ØXX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010
APPROVALS				DATE							
DRAWN				DY				7/24/09			
CHECKED											
APPROVED											
TITLE				SIZE				PART NO.			
BOARD HOOKS, SIDE ENTRY				X				PCD-B1-XX			
REF: S00723T				SCALE: NTS				SHEET 1 OF 1			

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710