
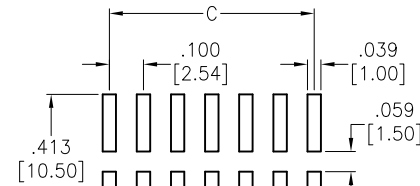




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/12/15	
A		UPDATE SPEC.	1/8/18	AY/LW
B		UPDATE DRAWING	12/9/20	LH/KL
C		UPDATE DRAWING	12/11/20	OW/KL
D		UPDATED DIM.	8/25/23	JJ/RL
E		UPDATED DRAWING	7/29/24	LH/NL

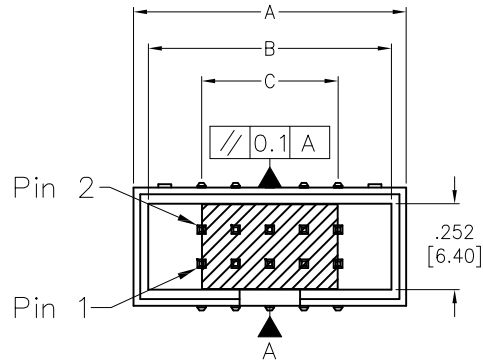

RECOMMENDED PCB LAYOUT

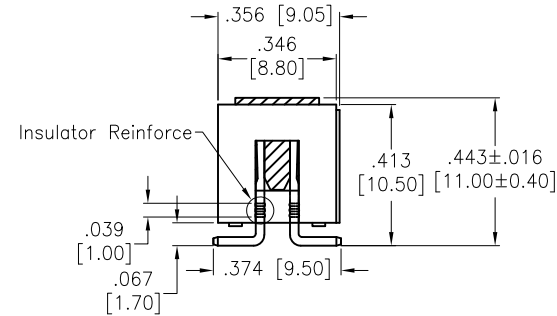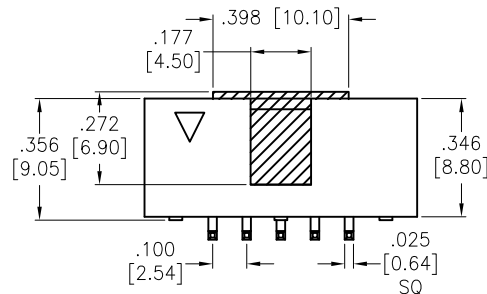

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold Flash over Nickel underplate on mating area,

Tin over Nickel underplate on solder tails

Electrical:

Current rating: 3 Amp

Contact resistance: 20 mohms max @ DC 100 mA

Insulation resistance: 5000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS Compliant



PACKAGED ON TAPE & REEL

Positions: 6 thru 64

A = .100 [2.54] X No. of Spaces + .399 [10.14]

B = .100 [2.54] X No. of Spaces + .313 [7.94]

C = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES
.X	± .10	ØX ±.10
.XX	± .020	ØXX ±.015
.XXX	± .015	ØXXX ±.010

DRAWN	AY	3/12/15
CHECKED	SL	3/12/15
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		BOX HEADER, VERTICAL, SMT TYPE SEL-GOLD PLATED, W/ CAP, TAPE & REEL	
SIZE X	PART NO. BHR-XX-VSGA-SMT-PP-T/R	REV. E	
REF: S00059T	SCALE: NTS	SHEET 1 OF 1	