
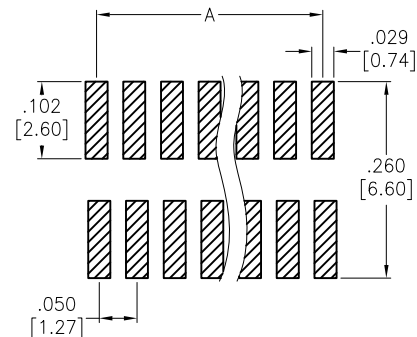




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/5/18	

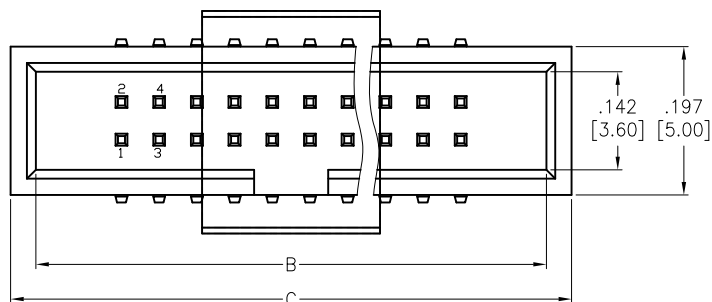

RECOMMENDED PCB LAYOUT

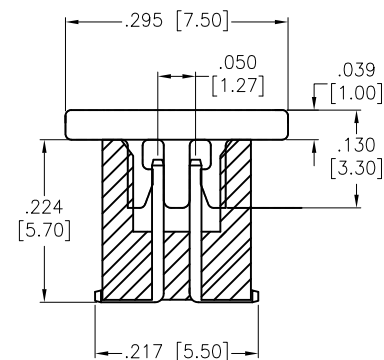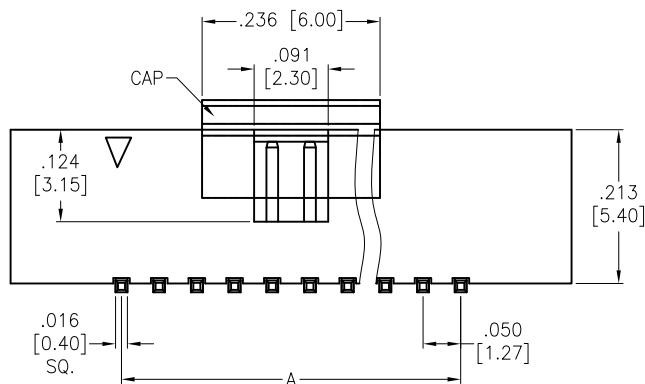

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate on contact area,

Tin over Nickel underplate on solder tails

Electrical:

Current rating: 1 Amp

Contact resistance: 20 mohms max

Insulation resistance: 1,000 Mohms

Dielectric withstanding voltage: 500 VAC

Temperature Rating:

-40°C to +105°C

Environmental:

Lead free, RoHS compliant



PACKAGED ON TAPE & REEL

Positions: 4 thru 100

A = .050 [1.27] x No. of Spaces

B = .050 [1.27] x No. of Positions per Row + .193 [4.90]

C = .050 [1.27] x No. of Positions per Row + .244 [6.20]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS

DRAWN	AY	10/5/18
CHECKED	TW	10/5/18
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
.050" x .050" BOX HEADER, VERTICAL,
SMT, SEL-GOLD PLATED, TAPE & REEL

SIZE X	PART NO. HBHR-B2-XX-VSG-SMT-PP-T/R	REV. -
REF: S00111C	SCALE: NTS	SHEET 1 OF 1