
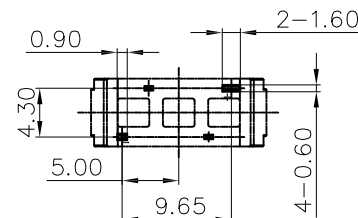







APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/13/19	
A		UPDATE DRAWING	3/27/20	OW/OC



RECOMMENDED PCB LAYOUT
(BOTTOM VIEW)

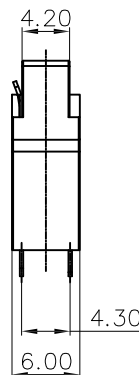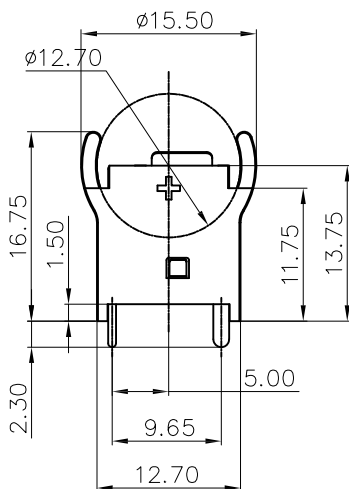

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze, T=0.3MM, Nickel plated

Electrical:

Contact resistance: 100 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 500 VAC ONE SEC LEVEL

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLES
X ± 0.30 X ± 1°
X.X ± 0.25 X.X ± 0.5°
X.XX ± 0.20
X.XXX ± 0.10

APPROVALS		DATE
DRAWN	OW	11/13/19
CHECKED	DH	11/13/19
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		COIN CELL BATTERY HOLDER FOR ONE CELL CR1220 & 1225		
SIZE	PART NO.	REV.		
X	BH-115A-1	A		
REF:	S00136C	SCALE:	NTS	SHEET 1 OF 1