
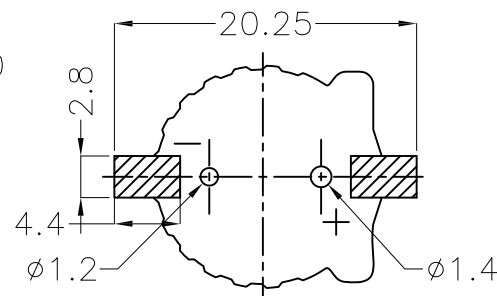
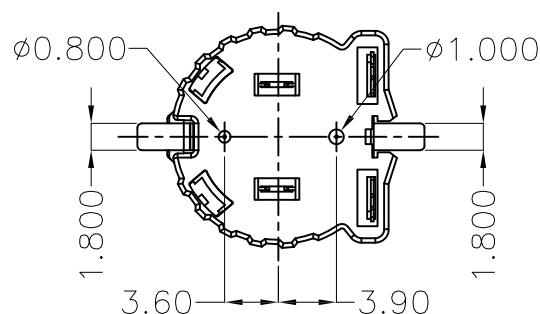




APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/4/20	

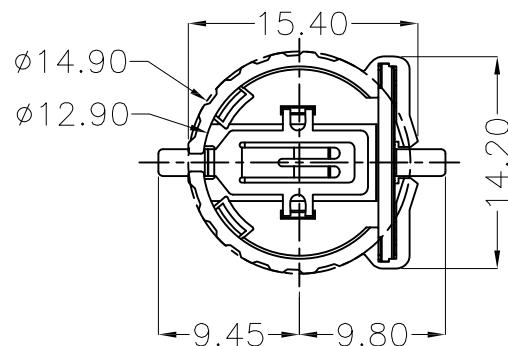

SPECIFICATIONS:

Material:

Housing: (PPS) Hi-Temp Thermoplastic, rated UL94V-0, Color: Brown

Contact: Phosphor Bronze, Gold plated

Electrical:

Contact resistance: 30 mohms max

Insulation resistance: 1,000 Mohms min

Dielectric Voltage: 500 VAC one sec level

Temperature Rating:

Operating temperature: -25°C to +85°C.

Environmental:

Lead free, RoHS compliant




PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE X. ± 0.30 X. ± 1° .X ± 0.25 .X ± 0.5° .XX ± 0.20 .XXX ± 0.10		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE	
DRAWN	LH	8/4/20		BATTERY HOLDER, SURFACE MOUNT, FOR CR1220, BROWN COLOR	
CHECKED	RT	8/4/20		SIZE	PART NO.
APPROVED				X	BH-44C-5-T/R
REF: S00136C		SCALE: NTS		SHEET 1 OF 2	


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
SEE SHT 1 OF 2 FOR REVISION				

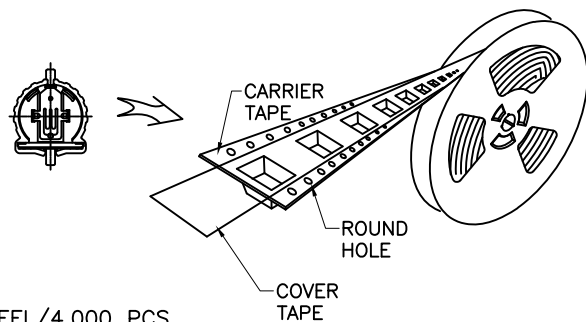


8 REEL/4,000 PCS




8 REEL/BAG

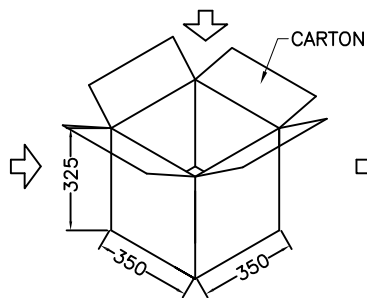


—CARTON



8 REEL/CARTON
4,000 PCS/CARTON

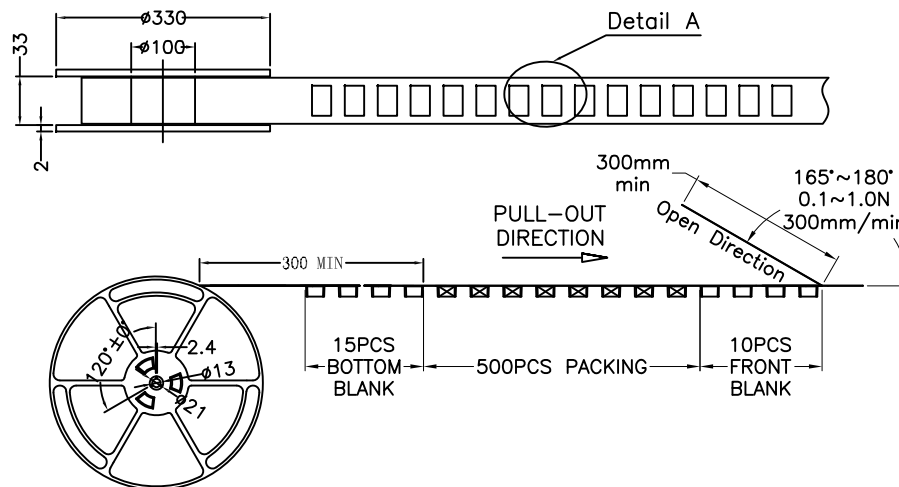

Detail A

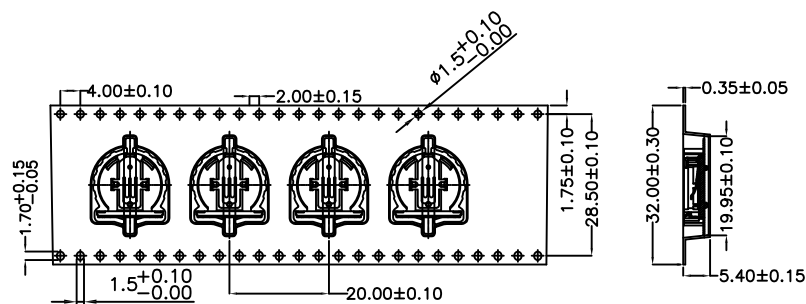

Detail A

NOTE:

1. 10 sprocket hole pitch cumulative tolerance $\pm 0.2\text{mm}$
2. Carrier camber is 1mm in 250mm
3. All dimensions meet EIA-481-C requirements
4. Material: PS, Black, Thickness=0.35mm
5. 330mm/1R= 10.5m, 500PCS
6. Tolerances except as noted: Radius=0.2~0.3mm, Draft angle: 3° max

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X. ± 0.30	X. ± 1°
.X ± 0.25	.X ± 0.5°
.XX ± 0.20	
.XXX ± 0.10	

APPROVALS		DATE
DRAWN	LH	8/4/20
CHECKED	RT	8/4/20
APPROVED		

ADAM
TECH
INTERCONNECT

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE	BATTERY HOLDER, SURFACE MOUNT, FOR CR1220, BROWN COLOR
-------	---

SIZE X	PART NO. BH-44C-5-T/R	REV. -
REF: S00136C	SCALE: NTS	SHEET 2 OF 2