

6

5

4

3





2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/7/16	

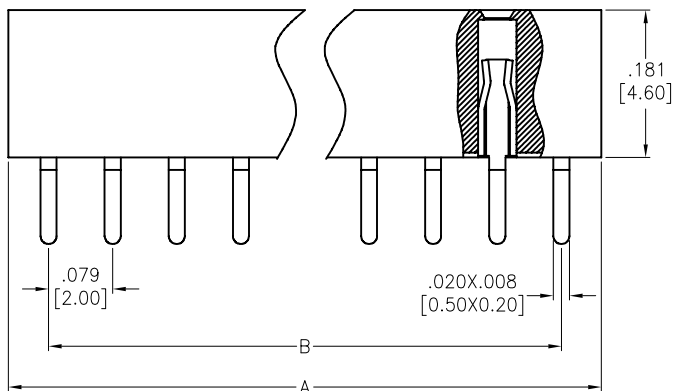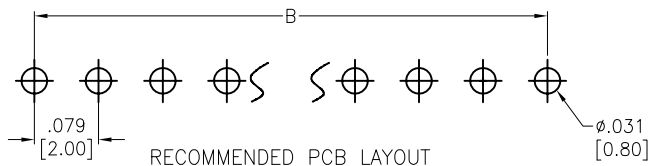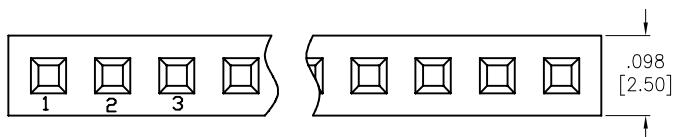

PECIFICATIONS:

Material:  
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Gold flash over Nickel underplate overall  
 Electrical:  
 Current rating: 2.0 Amps  
 Contact resistance: 20 mohms max.  
 Insulation resistance: 1,000 Mohms min.  
 Dielectric withstanding voltage: 500 VAC/DC  
 Temperature Rating:  
 Operating temperature: -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant



Positions: 01 thru 40

A = .079 [2.00] x No. of Positions + .020 [0.50]

B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE .079 [2.00] SINGLE ROW RECEPTACLE STRIP,  
 .181 [4.60] HEIGHT, GOLD PLATED, HI-TEMP

APPROVALS		DATE
DRAWN	AY	1/7/16
CHECKED	MY	1/7/16
APPROVED		

SIZE X	PART NO. 2RS1Y1-XX-G-HT	REV. -
REF: S00111C	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1