


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/4/25	
A		UPDATE DRAWING	10/13/25	LH/RC

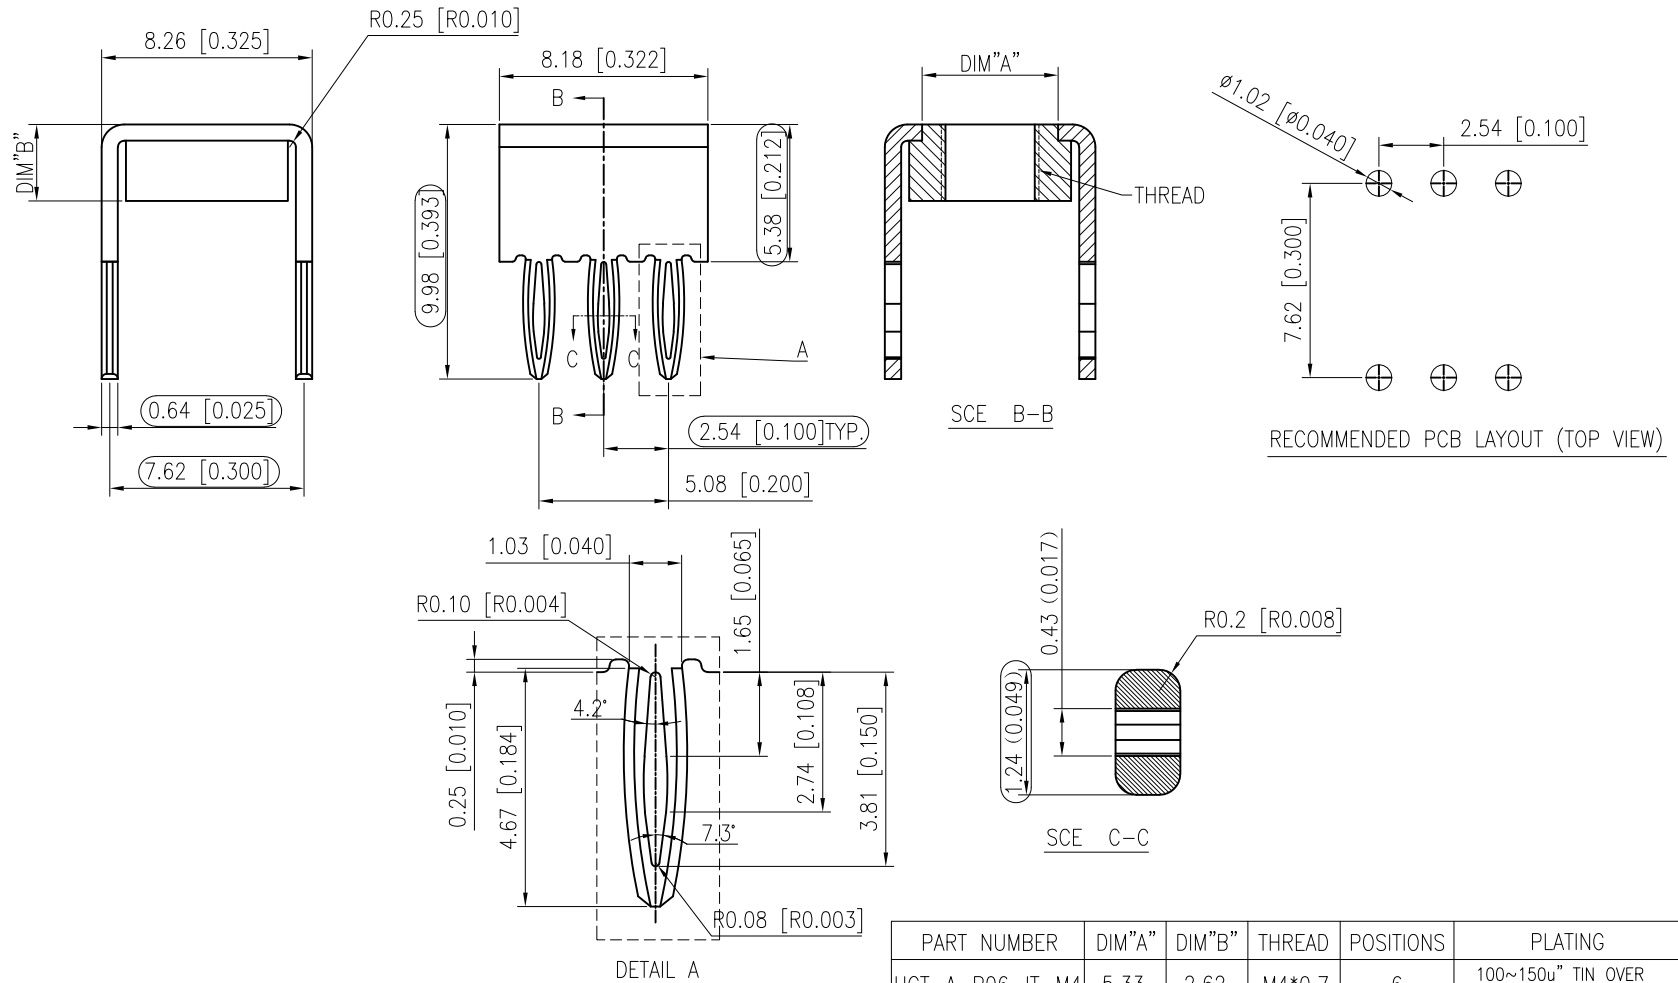

NOTES:

1. MATERIAL: PHOSPHOR BRONZE,T0.64mm;
2. PLATING THICKNESS TO BE CHECKED AT CENTER OF PC TAILS, TIN COVERAGE REQUIRED ON ALL INSIDE SURFACES
- 3-1:CURRENT RATING:25.0A;
3-2:MAXIMUM CURRENT CARRYING CAPACITY:40A;
4. THREADED INSERT MUST WITHSTAND TORQUE OF 20 INCH/POUNDS WITHOUT DISLODGING
5. FEATURES MARKED WITH  TO BE INSPECTED BY SUPPLIER AND CERTIFICATE OF COMPLIANCE SUPPLIED WITH EACH SHOPPMENT
6. STANDARD PACKAGE, 500PCS/BAG
- 7: THREADED INSERT PUSH OUT FORCE:(30 LBS. MIN.)
8. OPERATING TEMPERATURE RANGE:-30°C ~ +85°C;
9. ALL MATERIAL MUST BE COMPLY WITH ROHS;



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	.X ± 0.20	ANGLE	.X ± 5°
	.XX ± 0.10		.XX ± 2°
	.XXX ± 0.05		.XX ± 1°

DRAWN	LH	9/4/25
CHECKED	RC	9/4/25
APPROVED		

CONFIDENTIAL AND PROPRIETARY
© Adam Tech. All rights reserved. This document contains confidential and proprietary information belonging to Adam Tech. It is provided solely for design and reference purposes by authorized parties. Any reproduction, distribution, display, or disclosure to third parties, in whole or in part, without the prior written consent of Adam Tech, is strictly prohibited. Adam Tech retains all rights, including copyright, trademark, trade secret, and all other intellectual property rights worldwide.

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
adam-tech.com

TITLE POWER TAP CONNECTOR 6P W/ THREADED INSERT			
SIZE X	PART NO. HCT-A-P06-IT-M4	REV. A	
REF: S00181C	SCALE: NTS	SHEET 1 OF 1	