





APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/7/23	
A		PACKAGING WAS TRAY	10/27/25	SS

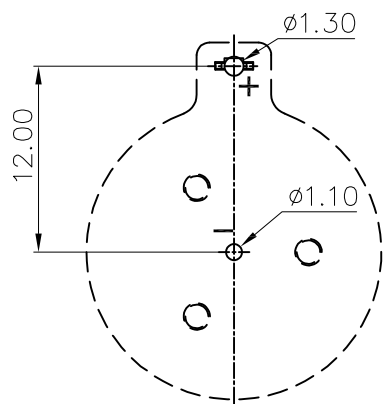

RECOMMENDED PCB LAYOUT

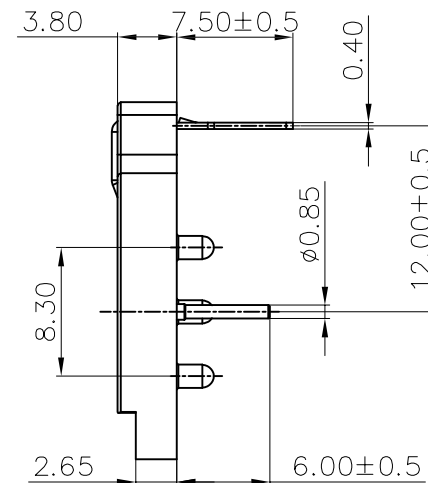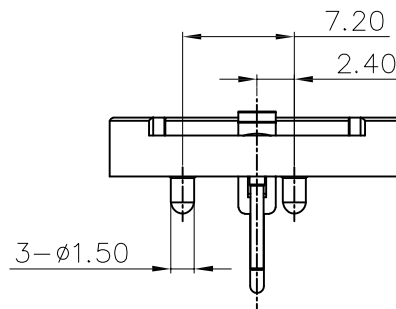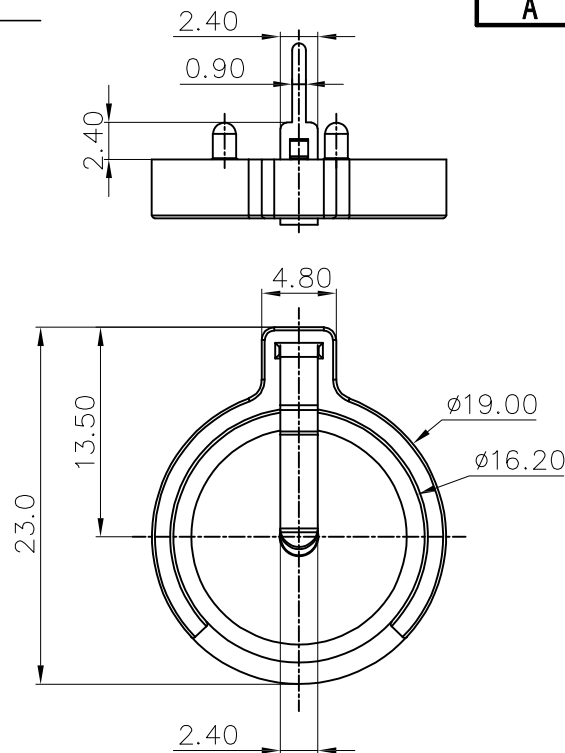

NOTE: PACKAGED IN POLY BAG

SPECIFICATIONS:

Material:

Housing: PBT, rated UL94V-0

Housing Color: White

Contact: Phosphor Bronze, Nickel plated

Electrical:

Contact resistance: 30 Milliohms max

Insulation resistance: 1,000 Megaohms min

Dielectric Voltage: 750 VAC one sec level

Temperature Rating:

Operating temperature: -55°C to +85°C.

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	X. ± 0.30	X ± 1"
	.X ± 0.25	.X ± 0.5"
	.XX ± 0.20	.XX ± 0.5"
	.XXX ± 0.10	.XXX ± 0.5"

DRAWN WX 2/7/23

CHECKED YC 2/7/23

APPROVED

CONFIDENTIAL AND PROPRIETARY
© Adam Tech. All rights reserved. This document contains confidential and proprietary information belonging to Adam Tech. It is provided solely for design and reference purposes by authorized parties. Any reproduction, distribution, display, or disclosure to third parties, in whole or in part, without the prior written consent of Adam Tech, is strictly prohibited. Adam Tech retains all rights, including copyright, trademark, trade secret, and all other intellectual property rights worldwide.

**ADAM
TECH**

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
adam-tech.com

TITLE
**COIN CELL BATTERY HOLDER FOR
CELL CR1620, DIP TYPE**

SIZE X	PART NO. BH-94B-1	REV. A
REF: S00136C	SCALE: NTS	SHEET 1 OF 1