


APPROVED: _____

DATE: _____ TITLE: _____


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/6/20	
A		UPDATE DRAWING.	5/11/21	JJ/RC
B		UPDATE SPEC.	5/18/21	JJ/RC
C		UPDATE SPEC.	5/27/22	WX/MC

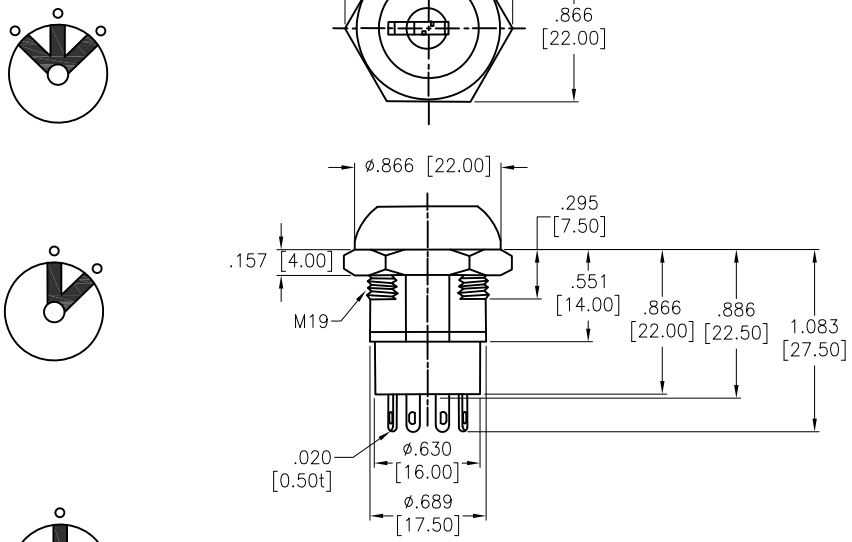

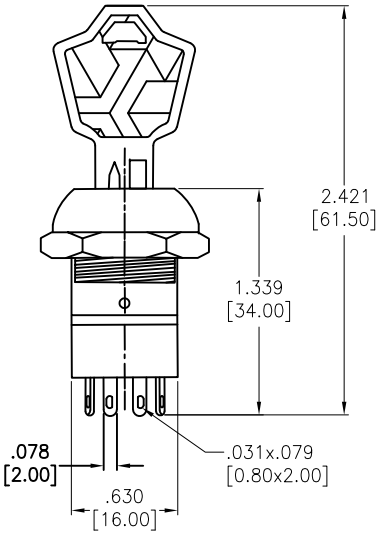



RECOMMENDED PANEL CUT

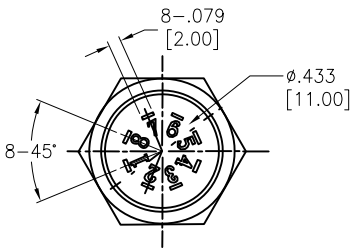

SW-R-K13X-X

	FUNCTION
K13A	SP, ON-ON
K13B	DP, ON-ON

	Function
A	Key pulled on both positions. Note: this would be our standard
B	Key pulled on 1 position

SPECIFICATIONS:
Material:
Body: Steel, Polished Chrome, Silver plated
Electrical:
The rated load: 125 VAC, 4A
250 VAC, 2A
28 VDC, 4A
Contact resistance: 20 mΩ max
Insulation resistance: 100 mΩ min (500VDC)
Dielectric withstanding voltage: 1000 VAC for 1 minute
Mechanical life: ≧10000 Cycles
Temperature Rating:
-20°C to +85°C
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

DRAWN	OW	11/6/20
CHECKED	AC	11/6/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH
909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE: SWITCH, KEY LOCK, 19MM
PANEL MOUNT, SOLDER TERMINAL

SIZE	PART NO.	REV.
X	SW-R-K13X-X	C

REF: S00206C | SCALE: NTS | SHEET 1 OF 1