



Rev	AWO #	Description	Date	Appr
-		RELEASED	4/13/09	
A		UPDATE SPEC.	11/6/15	AY/TW
B		UPDATE SPEC.	6/20/19	OW/OC


APPROVED: \_\_\_\_\_  
DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_




RECOMMENDED PANEL CUTOUT FOR SINGLE WALL PLATE AND BACK PANEL FOR DOUBLE WALL PLATE

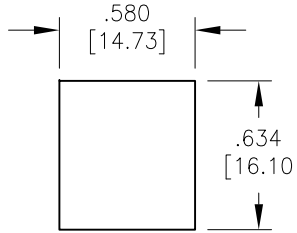



RECOMMENDED FRONT PANEL CUTOUT FOR DOUBLE WALL PLATE



DOUBLE WALL PLATE  
NOT TO SCALE



SINGLE WALL PLATE  
NOT TO SCALE

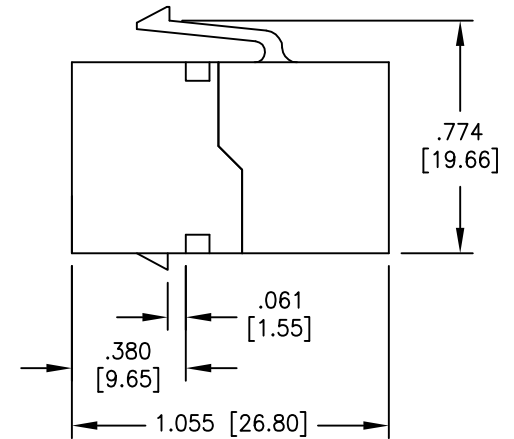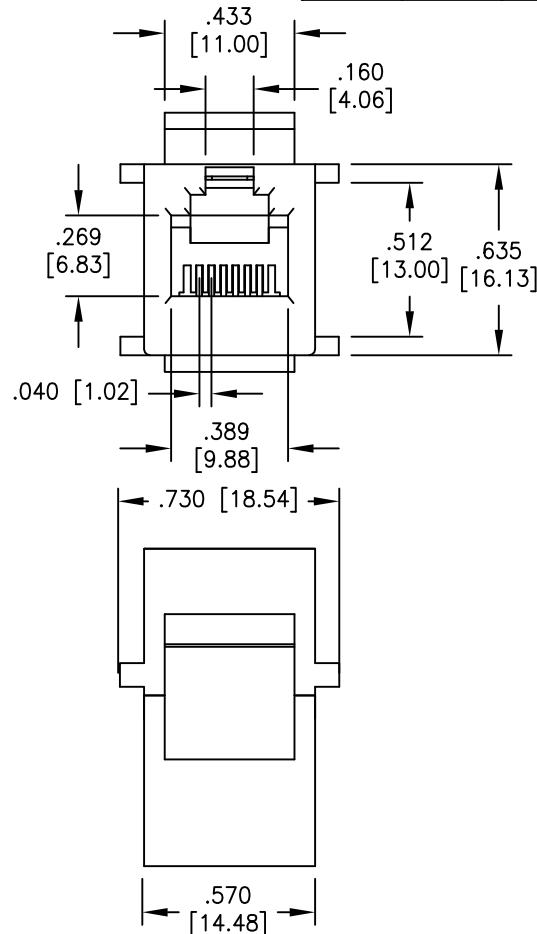

**SPECIFICATIONS:**

Material:

**B** Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Flat contact

Gold over Nickel underplate on contact area,


Tin over Copper underplate on solder tails

Round contact

Gold over Nickel underplate overall

(See chart for thickness)

Electrical:

Voltage rating: 150 VAC RMS. 

Current rating: 1.5 Amp

**A** Contact resistance: 20 mohms max.

Insulation resistance: 1000 Mohms min. @ 500 VDC

Dielectric withstanding voltage: 1000 VAC RMS for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmenta:

Leade free, RoHS Compliant



X	PLATING
0	15 uin Gold
1	30 uin Gold
2	50 uin Gold

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES  
.X ±.10 ØX ±.10  
.XX ±.020 ØXX ±.015  
.XXX ±.015 ØXXX ±.010

APPROVALS		DATE
DRAWN	DY	4/13/09
CHECKED		
APPROVED		

**ADAM TECH**  
**INTERCONNECTS**  
909 Rahway Avenue,  
Union, NJ 07083  
Phone: 908-687-5000  
Fax: 908-687-5710

TITLE MODULAR TELEPHONE JACK COUPLER 6P6C, PANEL MOUNT, COLOR BLACK		
SIZE X	PART NO. MTJC-66-X-B	REV. B
REF: S00005C	SCALE: NTS	SHEET 1 OF 1