
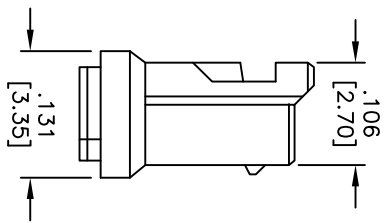
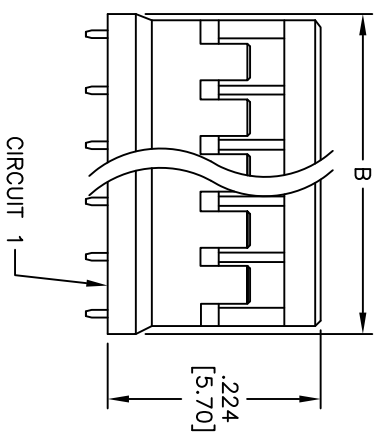


Rev	AWO #	Description	Date	Appr
-		RELEASED	01/17/07	

APPROVED: _____

DATE: _____ TITLE: _____

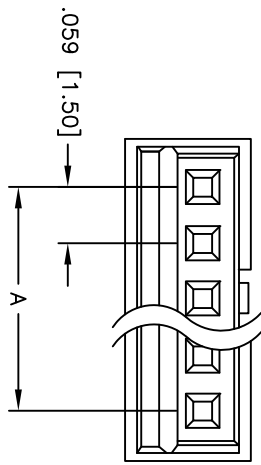

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Ivory
 Contacts: Brass
Plating:
 Tin over Nickel underplate overall

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

RoHS COMPLIANT

A=.059 [1.50] X NO. OF SPACES
 B=.059 [1.50] X NO. OF SPACES +.102 [2.60]

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
INCHES	HOLDERS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MX1.5mm HOUSING

SIZE	PART NO.	SCALE	SHEET 1 OF 1
X	15CH-B-XX	NTS	