
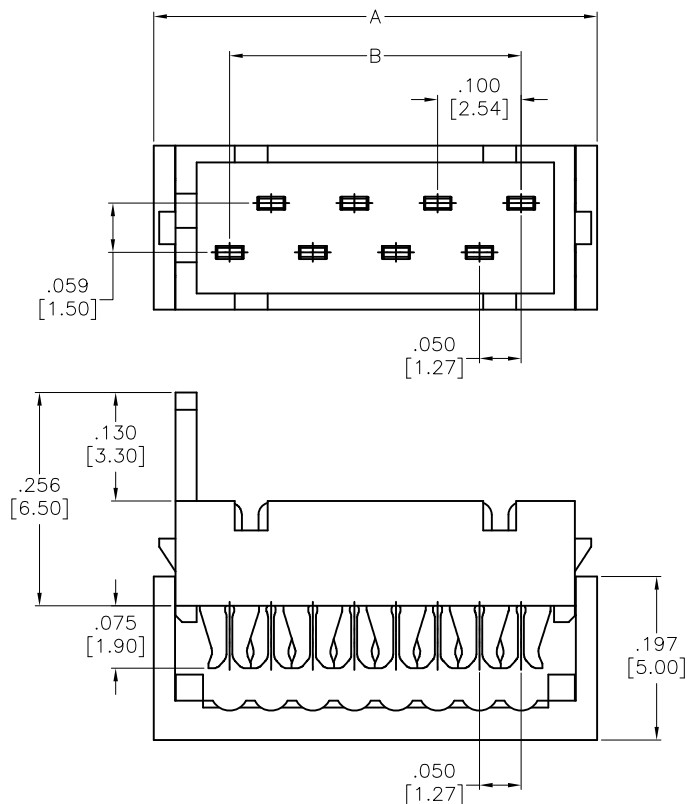


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/19/18	
A		UPDATE DRAWING	11/2/18	AY/LW
B		UPDATE DRAWING	12/25/18	AY/DH

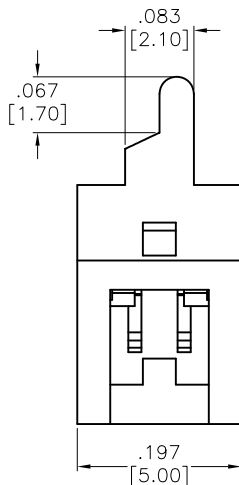

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Red
 Contacts: Copper Alloy
 Plating:
 Tin over nickel underplate overall
 Electrical:
 Current rating: 1.0 AMP
 Contact resistance: 20 mohms max.
 Insulation resistance: 1,000 Mohms min.
 Dielectric withstanding: 500V AC/DC
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant



Positions: 04 thru 26

A = .050 [1.27] x No. of Positions + .133 [3.37]

B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		ADAM TECH		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
INCHES		HOLES		TITLE	
.X	± .10	Ø.X	± .10	.100 [2.54] IDC CONNECTOR MALE, ON WIRE TYPE, TIN PLATED	
.XX	± .020	Ø.XX	± .015		
.XXX	± .015	Ø.XXX	± .010		
APPROVALS		DATE		SIZE	
DRAWN	AY	3/19/18		PART NO.	
CHECKED	LW	3/19/18		MPH-XX-F3-T	
APPROVED				REV.	
				B	
REF:		S00111C		SCALE: NTS	
				SHEET 1 OF 1	