


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/27/21	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

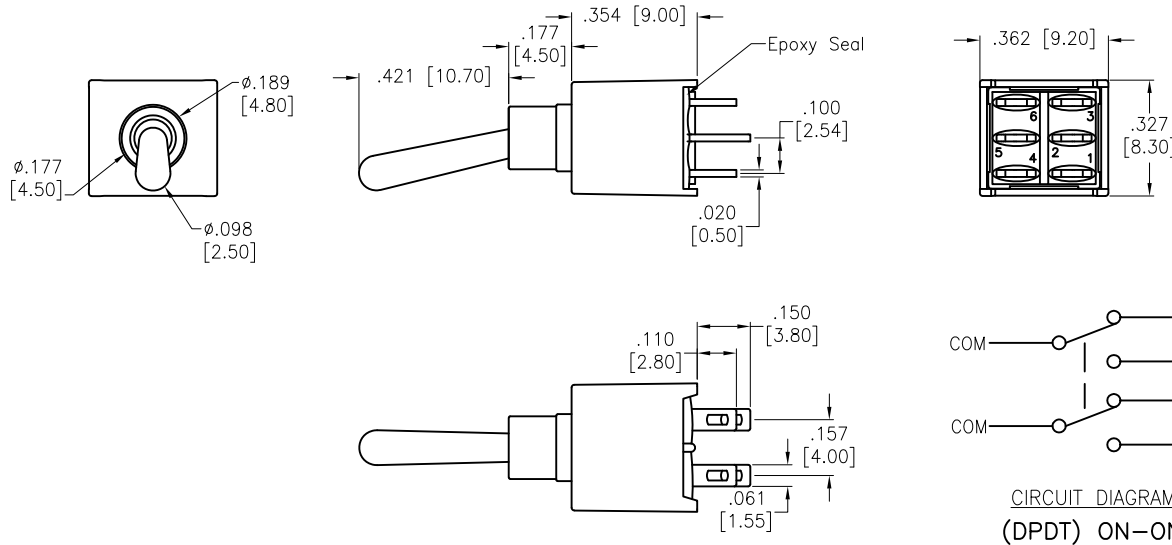

SW-T3-4B-A-T3-X-05

S=Contact Silver Plated  
G=Contact Gold Plated

**SPECIFICATIONS:**

Material:  
Movable contact: Copper Alloy, Silver plated  
Terminals: Silver Plated With outer Layer in Gold Plating  
Electrical:  
Rating: 3 Amps with resistive load @ 125VAC or 28VDC  
1.5 Amps with resistive load @ 250VAC  
Contact resistance: 20 mohms max initial  
Insulation resistance: 1,000 Mohms min  
Dielectric withstanding voltage: 1500V RMS @ sea level  
Electrical life: 30,000 make and break cycles at full load  
Temperature Rating:  
Operating temperature: -30°C to +85°C  
Environmental:  
IP Class: IP67  
Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED					909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710																	
<table border="1"> <tr> <td colspan="2">INCHES</td> <td colspan="2">HOLES</td> </tr> <tr> <td>.X</td> <td>± .10</td> <td>ØX</td> <td>± .10</td> </tr> <tr> <td>.XX</td> <td>± .020</td> <td>ØXX</td> <td>± .015</td> </tr> <tr> <td>.XXX</td> <td>± .015</td> <td>ØXXX</td> <td>± .010</td> </tr> </table>					INCHES		HOLES		.X	± .10	ØX	± .10	.XX	± .020	ØXX	± .015	.XXX	± .015	ØXXX	± .010	TITLE	
INCHES		HOLES																				
.X	± .10	ØX	± .10																			
.XX	± .020	ØXX	± .015																			
.XXX	± .015	ØXXX	± .010																			
DRAWN	JJ	9/27/21	SIZE	PART NO.	REV.																	
CHECKED	RC	9/27/21	X	SW-T3-4B-A-T3-X-05	-																	
APPROVED			REF:	S00198T	SCALE:	NTS	SHEET 1 OF 1															
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH																						