


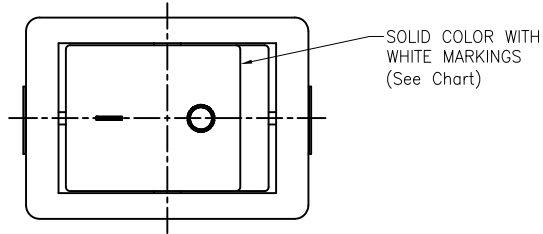


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/27/21	
A		UPDATE DRAWING	8/12/22	WX/AC1

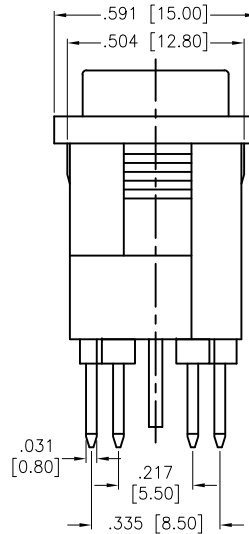

CIRCUIT DIAGRAM
(DPST) ON-OFF

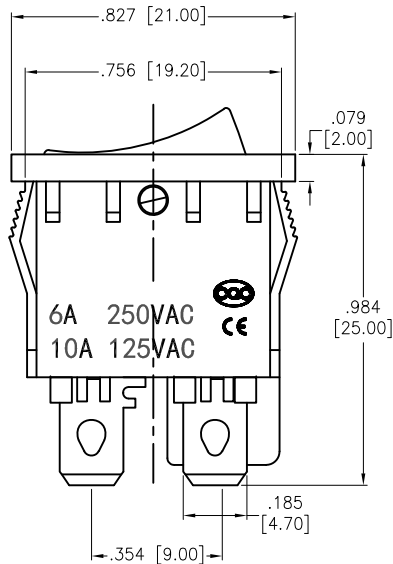

SW-R2-3A-F-X-4

	Actuator Markings
1	
2	
3	
4	
5	

Replace "x" in P/N with the corresponding switch color and marking

SPECIFICATIONS:

Material:
 Body: Nylon 66, Color Black, Rated UL 94V-0
 Terminal: Brass, Silver plated
 Button: Nylon 66, Solid color Black, White color markings.
 Electrical:
 Rating: 10A @ 125V AC
 6A @ 250V AC
 Contact resistance: 50 mohms max
 Insulation resistance: 100 mohms min
 Dielectric withstanding voltage: 1500V AC
 Electrical Life: 10,000 cycles min.
 Temperature Rating:
 Operating temperature: T85
 Environmental:
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED		
INCHES	HOLES	
.X ± .10	∅X ± .10	
.XX ± .020	∅XX ± .015	
.XXX ± .015	∅XXX ± .010	



909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

DRAWN	WX	10/27/21
CHECKED	RC	10/27/21
APPROVED		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH		

TITLE		SWITCH, ROCKER, DPST, ON-OFF, COLOR BLACK, PANEL MOUNT, .187" [4.8] SOLDER	
SIZE	PART NO.	REV.	
X	SW-R2-3A-F-X-4	A	
REF:	S00206C	SCALE:	NTS
		SHEET	1 OF 1