

6

5

4

3

2


1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/22/21	
A		UPDATE DIM.	6/10/21	JJ


D

D

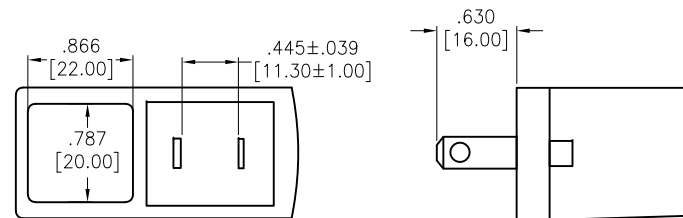

C

C

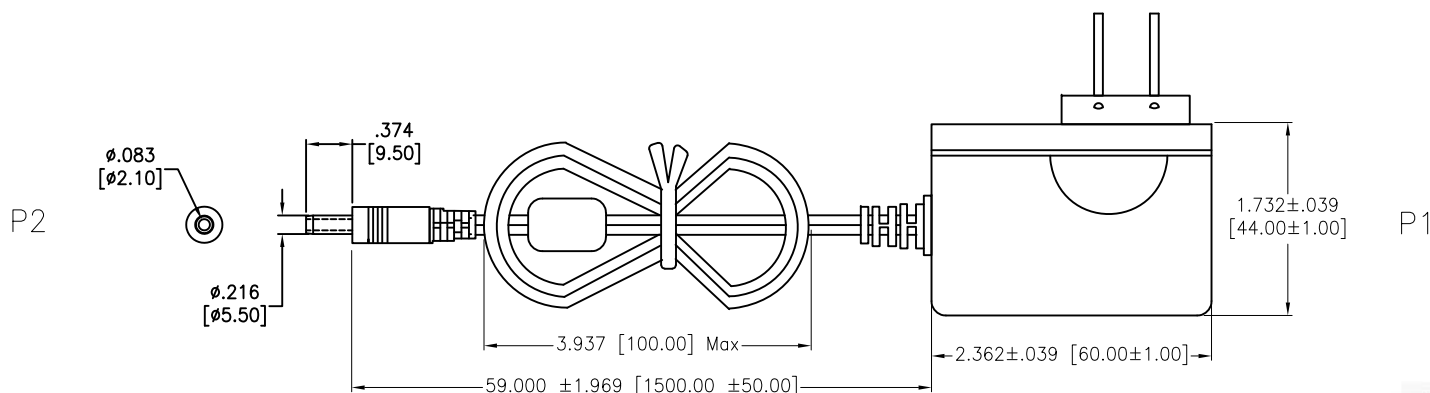

SPECIFICATIONS:

Connector

P1: Power Adapter, NEMA 1-15P

P2: DC Plug, W/Strain Relief, 5.5*2.1*9.5mm
Overmold Color: Black

CABLE:

UL2468: 18AWG, Jacket Color: Black

Electrical:

Input:

Voltage: 100Vac to 240Vac

Current: 0.35A Max. @ 90~264Vac input & max load

Frequency: 50Hz / 60Hz

Output:

Voltage: 5V dc

Current: 2.5A max.

Line Regulation: ±5%

Fire rating: UL94V-0

Line Load Regulation-Output Rate: 5V, 2.5A

Insulator Resistance: 10 Mohms min @ 500VDC

Dielectric Strength(Hi-pot): 3000V AC For 1 Minute

Leakage Current: 0.25mAmax.@ 230Vac/50Hz

Temperature Rating:

Operating Temperature: 0°C to +40°C

Storage Temperature: -40°C to +70°C

Environmental:

Lead free, RoHS compliant.



A

A

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

DRAWN	WX	3/22/21
CHECKED	AC	3/22/21
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		REV.	
POWER ADAPTER TO DC PLUG, 5 VOLT, 2.5AMP, COLOR BLACK, UL2468 18AWG, 5.5X2.1X9.5MM		A	
SIZE	PART NO.		
X	PA-012		
REF:	SCALE: NTS	SHEET 1 OF 1	

6

5

4

3

2

1